

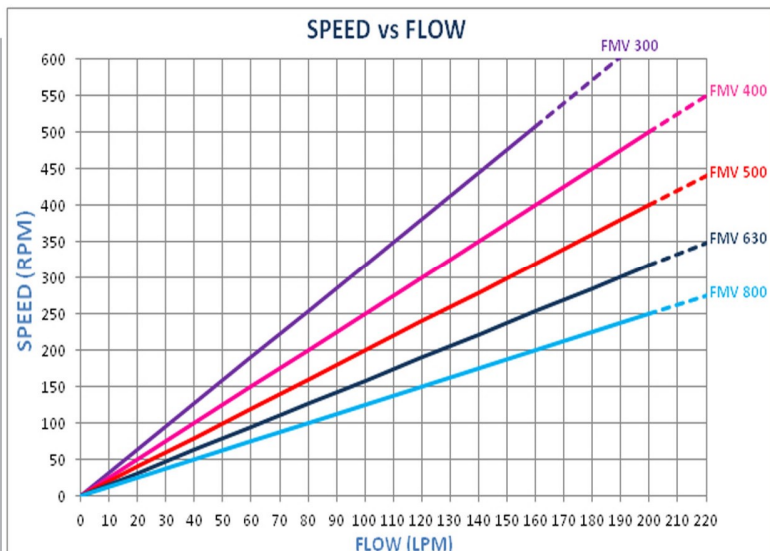


**FMV SERIES**

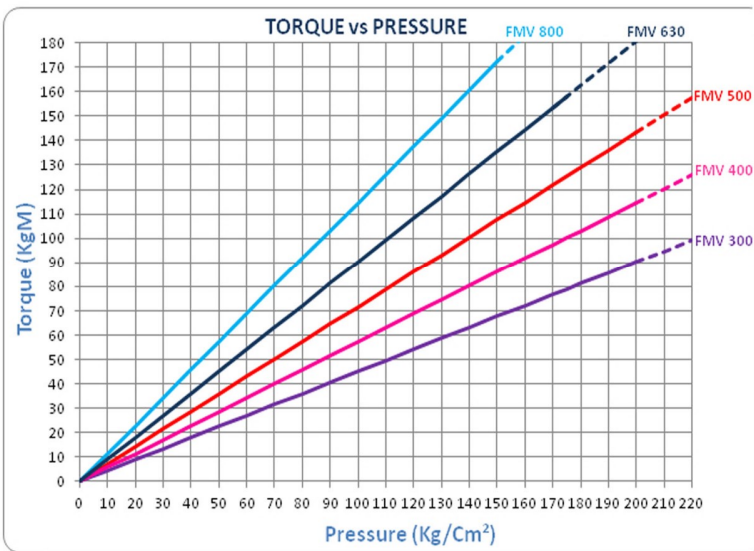

“Rotodyne” FMV Series, Hydraulic mtors are suitable for extra heavy duty application with high pressure and torque ratings

	FMV 300	FMV 400	FMV 500	FMV 630	FMV 800
Displacement (cc/rev)	315	400	500	630	800
Speed (Max) (rpm)	500	500	400	300	250
Torque (Max) Kg.M	90	113	143	158	170
Flow (Max) (Lpm)	160	200	200	200	200
Pressure (Max) (Kg/cm <sup>2</sup> )	200	200	200	175	150
Output (Max) (HP)	40.0	45.0	45.0	38.0	40.0
Length 'L' (mm)	215	222	230	240	254
Weight (Kg)	32.0	33.0	34.0	35.0	37.0

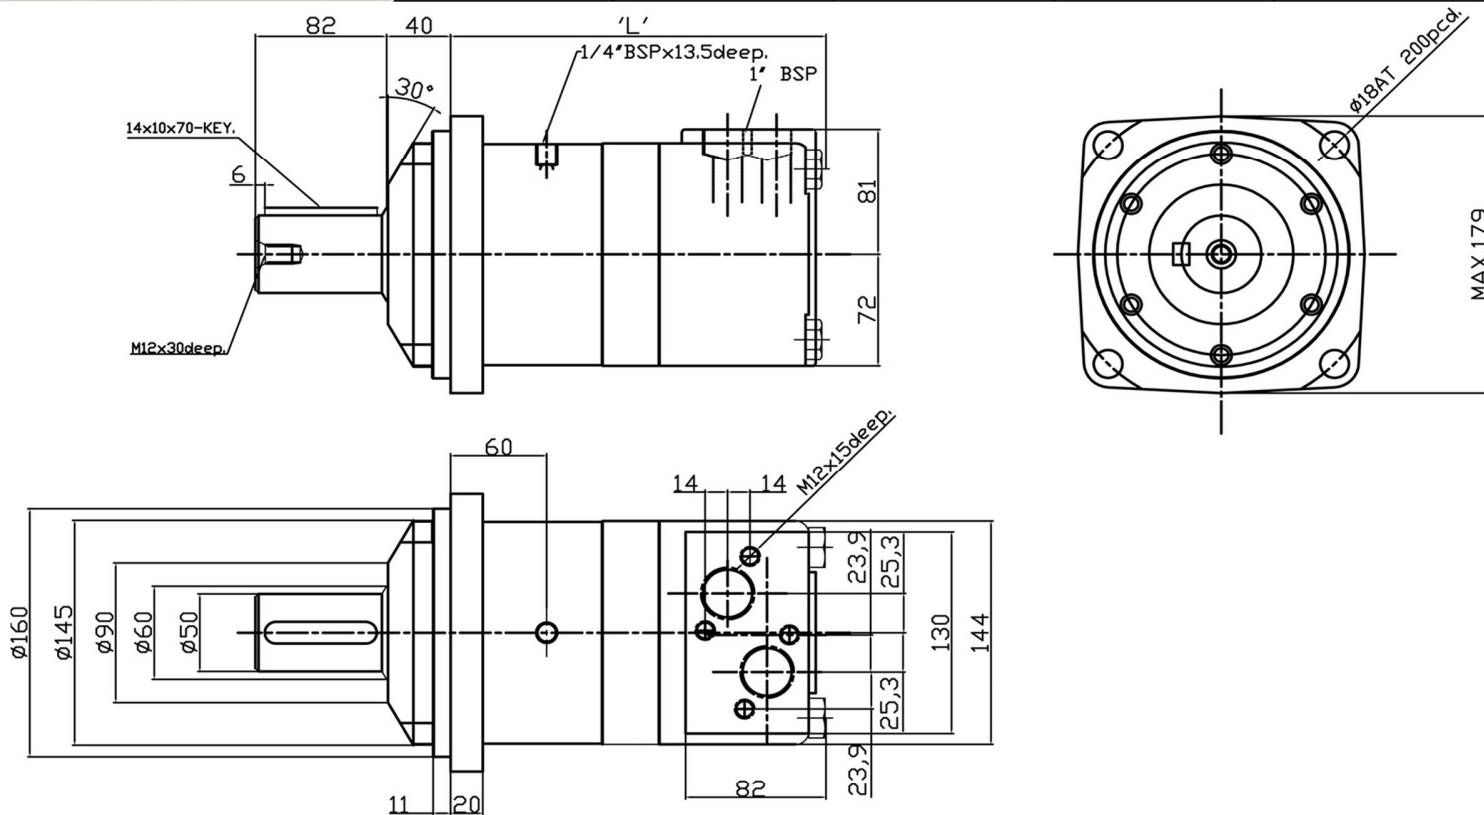

**Note:** Dotted Lines Indicate Operation in this region is not recommended for continuous application